

Scan me









+902127353949



www.yalcintrailer.com



/ yalcintrailer

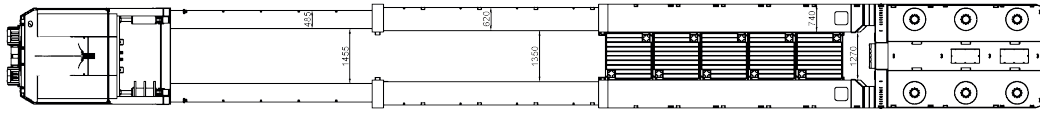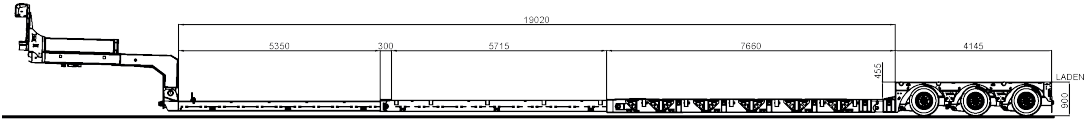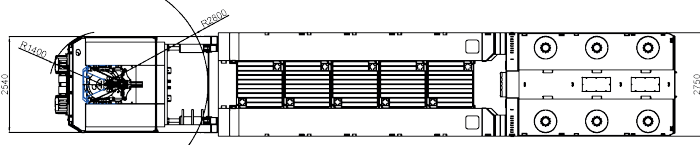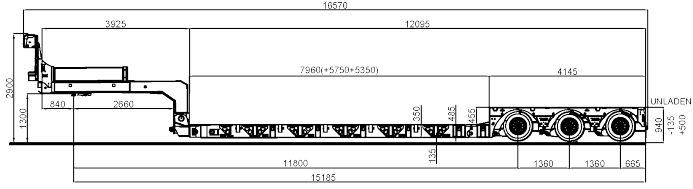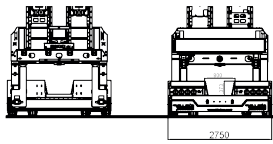

3PAUZ 3 AXLES LOW LOADER SEMI TRAILER

GENERAL CHARACTERISTICS

- Dead weight is 23,40 tons
- Double extendable low loading platform up to 19,06 meters
- Many lashing rings
- Side extension brackets and woods
- Pillar pockets
- Tropic wood covered portable middle platforms
- 20 ft and 40 ft container locks
- Hydraulic operated detachable gooseneck with 35 tons capacity
- Gooseneck operable via wireless remote control
- Stainless steel and galvanized steel tool boxes on gooseneck
- 245/70 R17,5 tyres
- Automatic lubrication system by GROENEVELD
- 30 tons capacity, portable aluminium loading ramps

LIGHTING SYSTEM

- 24V according to European Norms ASPÖCK ASS3 waterproof pins and plugs
- ASPÖCK fully LED lighting components, reflector kits, overload marker boards
- “CONVOI EXCEPTIONNEL” board
- Extra working lights

AXLES, SUSPENSION and STEERING

- BPW swivel-axles with 12 tons capacity per axle line at 80 km/h
- Technical capacity of an axle line is 18 tons at <20 km/h
- All axles are hydraulic steering
- TRIDEC TP-O LOW hydraulic pendle-axle suspension
- Excellent axle compensation, due to large suspension travel of 600 mm
- All axles are liftable axle by locking the suspension in the lowest position mechanically
- Manual steering and automatic axle alignment via wireless remote control
- Manual suspension lowering, raising and automatic driving height alignment via wireless remote control
- All hydraulic steering, hydraulic pendle-axle suspension and wireless remote control systems are supplied from TRIDEC

BRAKING SYSTEM

- Electro-pneumatic braking system according to European Norms
- WABCO 4S 2M EBS brake assembly
- Roll stability system
- Smart Board WABCO

FINISHING

- Shot blasting with SA2 norms
- Metallization of whole chassis with 15 years anti-rust warranty
- Two layers of primer and 2K acrylic painting
- All painting components are supplied from BASF

