
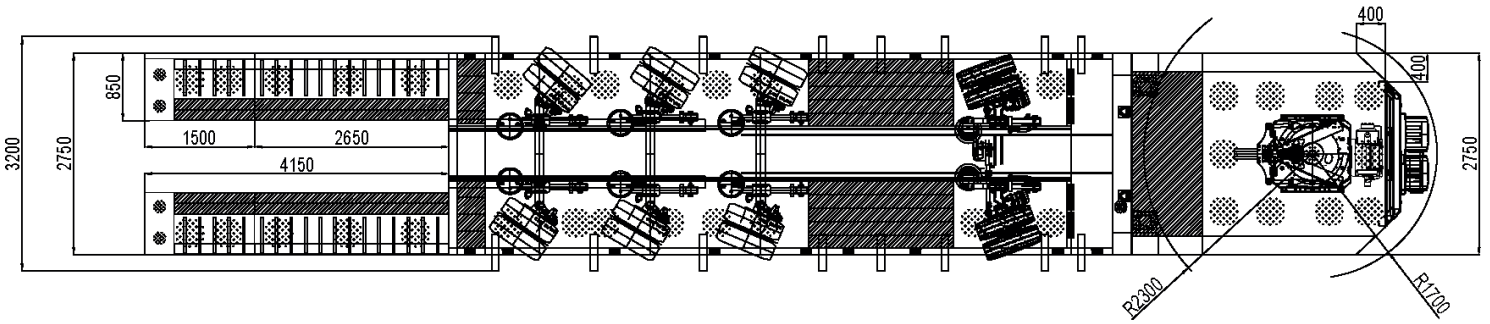
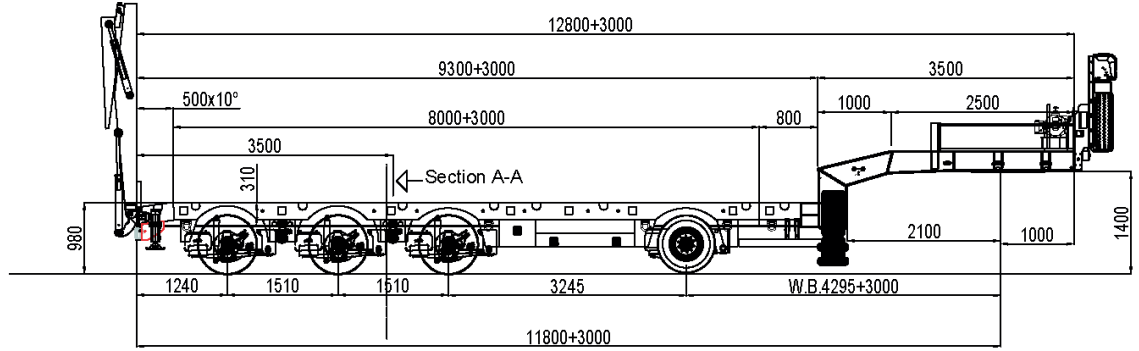




4 AXLES LOWBED SEMI TRAILER

GENERAL CHARACTERISTICS

- Dead weight is 17,5 tons
- Extendable loading platform up to 12,3 meters
- Detachable sliding bolster
- Multiple lashing rings
- Side extension brackets
- Pillar pockets
- Galvanized pillars and their holder
- Excavator well
- Hydraulic operated foldable loading ramps
- In and out hydraulic sliding mechanism of loading ramps
- Hydraulic operated support legs
- Loading ramps and support legs are operable via wireless remote controller
- Aluminium gooseneck climbing ramps
- Multiple stainless steel toolboxes
- Hot dipped galvanized open storage box
- 245/70 R17,5 PIRELLI with TPMS
- Automatic lubrication system by GROENEVELD
- 13 tons capacity electric winch and wireless remote controller
- Equipment and warning labels required by French regulations

LIGHTING SYSTEM

- 24V according to European Norms, ASPÖCK ASS3 waterproof pins and plugs
- ASPÖCK fully LED lighting components, reflector kits, overload marker boards
- "CONVOI EXCEPTIONNEL" written reflective board

AXLES & SUSPENSION

- BPW axles with 12 tons of capacity
- Air suspension system
- 1st axle is liftable and self steering
- 2nd, 3rd & 4th axles are hydraulic steering
- Manual steering via wireless remote controller
- Automatic axle alignment via wireless remote controller
- All hydraulic steering systems and wireless remote controlling systems are supplied by TRIDEC

BRAKING SYSTEM

- Electro-pneumatic braking system according to European Norms
- WABCO 4S-3M EBS brake assembly
- Roll stability system
- Smart Board WABCO

FINISHING

- Shot blasting with SA2 norms
- Full body metallization with 15 years anti-rust warranty
- Two layers of primer and 2K acrylic painting
- All painting components are supplied by BASF

