
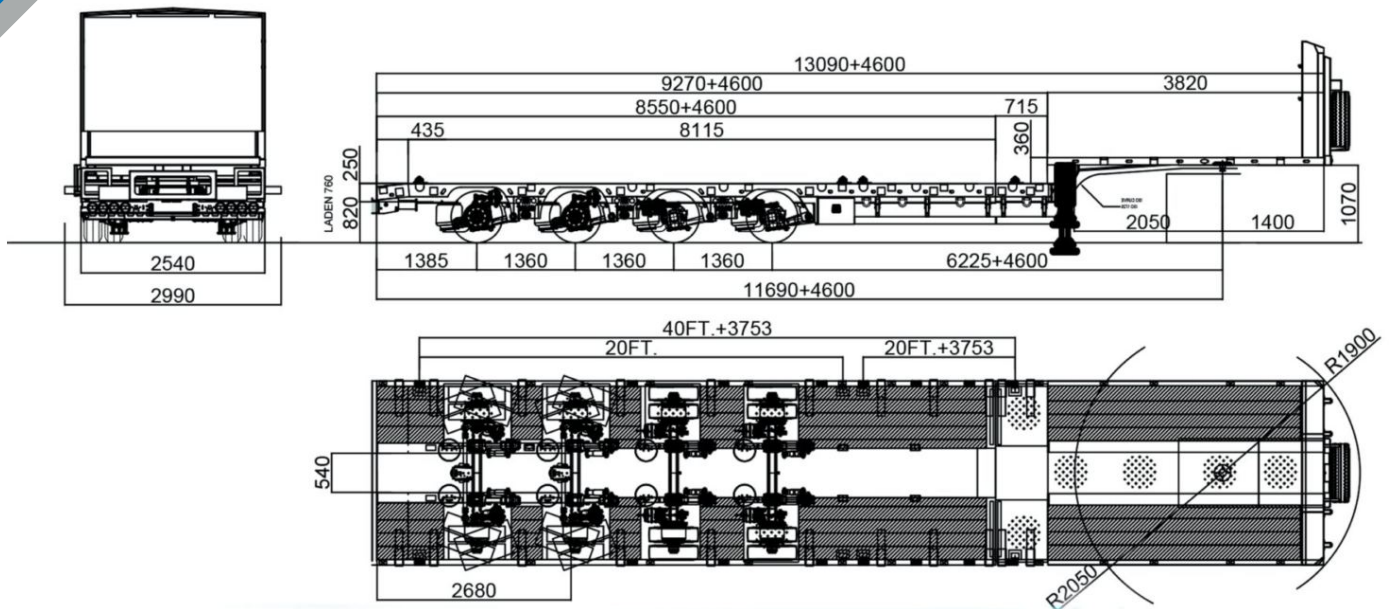




4DDUZ 4 AXLES LOWBED SEMI TRAILER

GENERAL CHARACTERISTICS

- Dead weight is 10,9 tons
- Extendable loading platform up to 13,87 meters
- 760 mm (laden) loading platform height with 205/65 R17,5 PIRELLI, GOODYEAR or CONTINENTAL tyres
- 90° gooseneck with 100 mm thickness
- Suitable for 6x2 trucks with 1.070 mm 5th wheel height
- Many lashing rings
- Side extension brackets
- Pillar pockets
- Excavator well
- Stainless steel tool boxes and tool box formed headboard
- Container lock slots for 20 ft and 40 ft containers
- 20 tons capacity, portable aluminium loading ramps

LIGHTING SYSTEM

- 24V according to European Norms, ASPÖCK ASS3 waterproof pins and plugs
- ASPÖCK fully LED lighting components, reflector kits, overload marker boards
- Extra working lights

AXLES, SUSPENSION and STEERING

- BPW axles with 9 tons capacity
- 8 tons capacity per axle with 205/65 R17,5 tyres
- Air suspension
- 1st axle is liftable
- 3rd and 4th axles are self-steering

BRAKING SYSTEM

- Electro-pneumatic braking system according to European Norms
- WABCO 4S 3M EBS brake assembly
- Roll stability system
- Smart Board WABCO

FINISHING

- Shot blasting with SA2 norms
- Two layers of primer and 2K acrylic painting
- All painting components are supplied from BASF

