


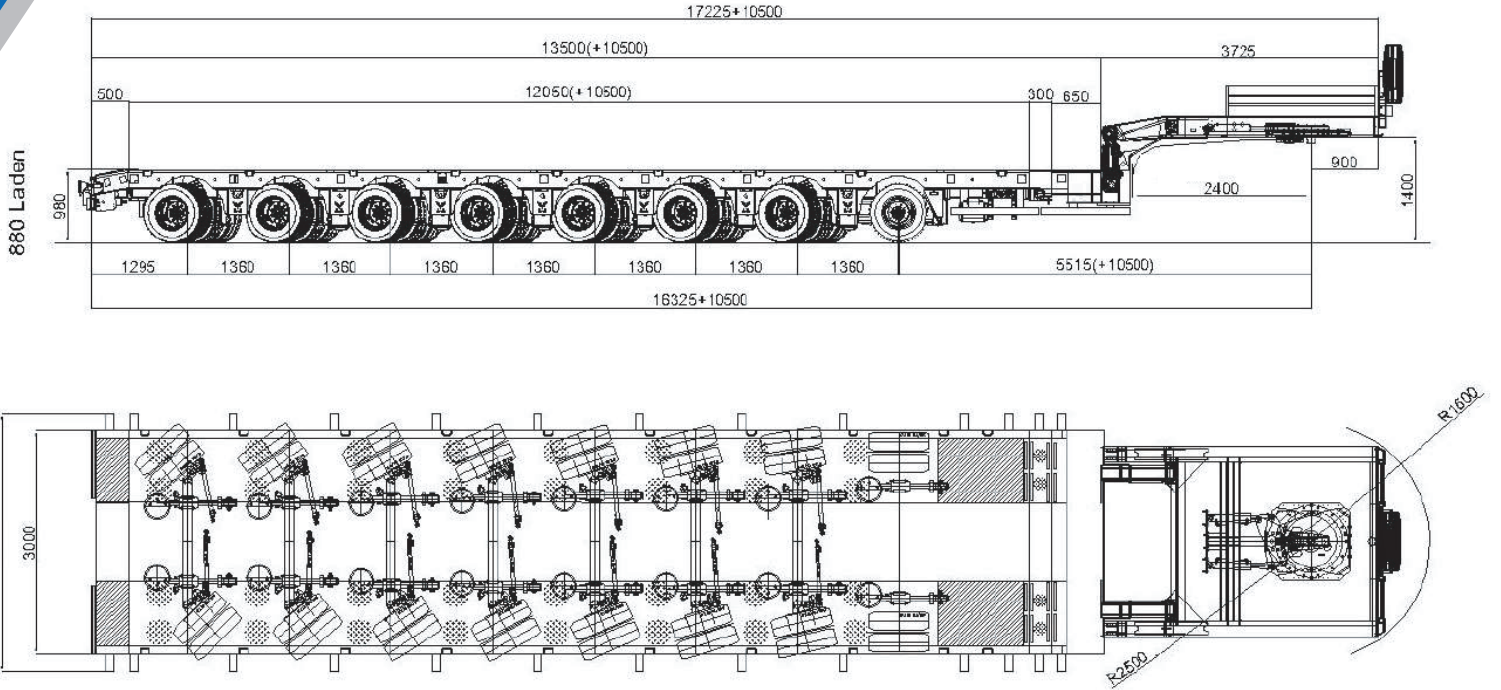

8 AXLES LOWBED SEMI TRAILER

GENERAL CHARACTERISTICS

- Dead weight is 27,5 tons
- Extendable loading platform up to 24 meters
- Hydraulic operated outer beam gooseneck
- Shelf formed galvanized head board and toolbox on it
- 300 mm non-detachable sliding bolster
- Multiple lashing rings
- Side extension brackets
- Pillar pockets
- Galvanized pillars and their holder
- Multiple stainless steel toolboxes
- Hot dipped galvanized open storage box
- 245/70 R17,5 PIRELLI with TPMS
- Automatic lubrication system by GROENEVELD
- Galvanized front landing legs with winch mechanism

LIGHTING SYSTEM

- 24V according to European Norms, ASPÖCK ASS3 waterproof pins and plugs
- ASPÖCK fully LED lighting components, reflector kits, overload marker boards
- “CONVOI EXCEPTIONNEL” written reflective board

AXLES & SUSPENSION

- BPW axles with 12 tons of capacity
- Automatic tire inflation system BPW Air-Save
- Air suspension system
- 1st axle is fixed & rest of the axles are hydraulic steering
- 1st, 2nd & 3rd axles are liftable
- Manual steering via wireless remote controller
- Automatic axle alignment via wireless remote controller
- All hydraulic steering systems and wireless remote controlling systems are supplied by TRIDEC

BRAKING SYSTEM

- Electro-pneumatic braking system according to European Norms
- WABCO 4S-2M EBS brake assembly
- Roll stability system

FINISHING

- Shot blasting with SA2 norms
- Full body metallization with 15 years anti-rust warranty
- Two layers of primer and 2K acrylic painting
- All painting components are supplied by BASF

