


Scan me

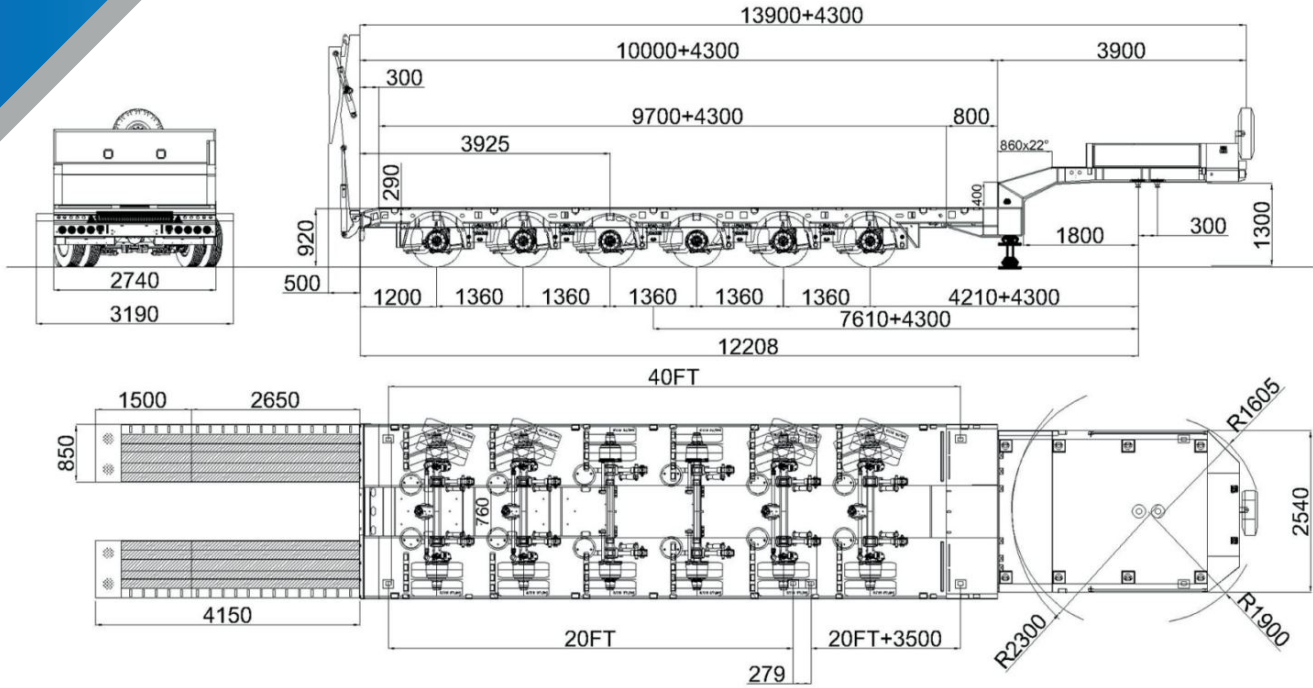

6DDUZ 6 AXLES LOWBED SEMI TRAILER

GENERAL CHARACTERISTICS

- Dead weight is 18,3 tons
- 2,75 meters wide, extendable loading platform up to 14,3 meters
- Many lashing rings
- Side extension brackets
- Pillar pockets
- Excavator well
- Stainless steel tool box on gooseneck
- Hydraulic operated and galvanized foldable loading ramps
- In and out hydraulic sliding mechanism of loading ramps
- Container lock slots for 20 ft and 40 ft containers
- Galvanized desk to level the height with gooseneck, equipped with container lock slots
- 245/70 R17,5 PIRELLI, GOODYEAR or CONTINENTAL tyres
- ALCOA DURA BRIGHT aluminium rims
- Automatic lubrication system by GROENEVELD

LIGHTING SYSTEM

- 24V according to European Norms, ASPÖCK ASS3 waterproof pins and plugs
- ASPÖCK fully LED lighting components, reflector kits, overload marker boards
- Extra working lights

AXLES, SUSPENSION and STEERING

- BPW axles with 12 tons capacity
- Air suspension
- 1st, 2nd and 3rd axles are liftable
- 1st, 2nd and 5th, 6th axles are self-steering

BRAKING SYSTEM

- Electro-pneumatic braking system according to European Norms
- WABCO 4S 3M EBS brake assembly
- Roll stability system
- Smart Board WABCO

FINISHING

- Shot blasting with SA2 norms
- Metallization of whole chassis with 15 years anti-rust warranty
- Two layers of primer and 2K acrylic painting
- All painting components are supplied from BASF

