


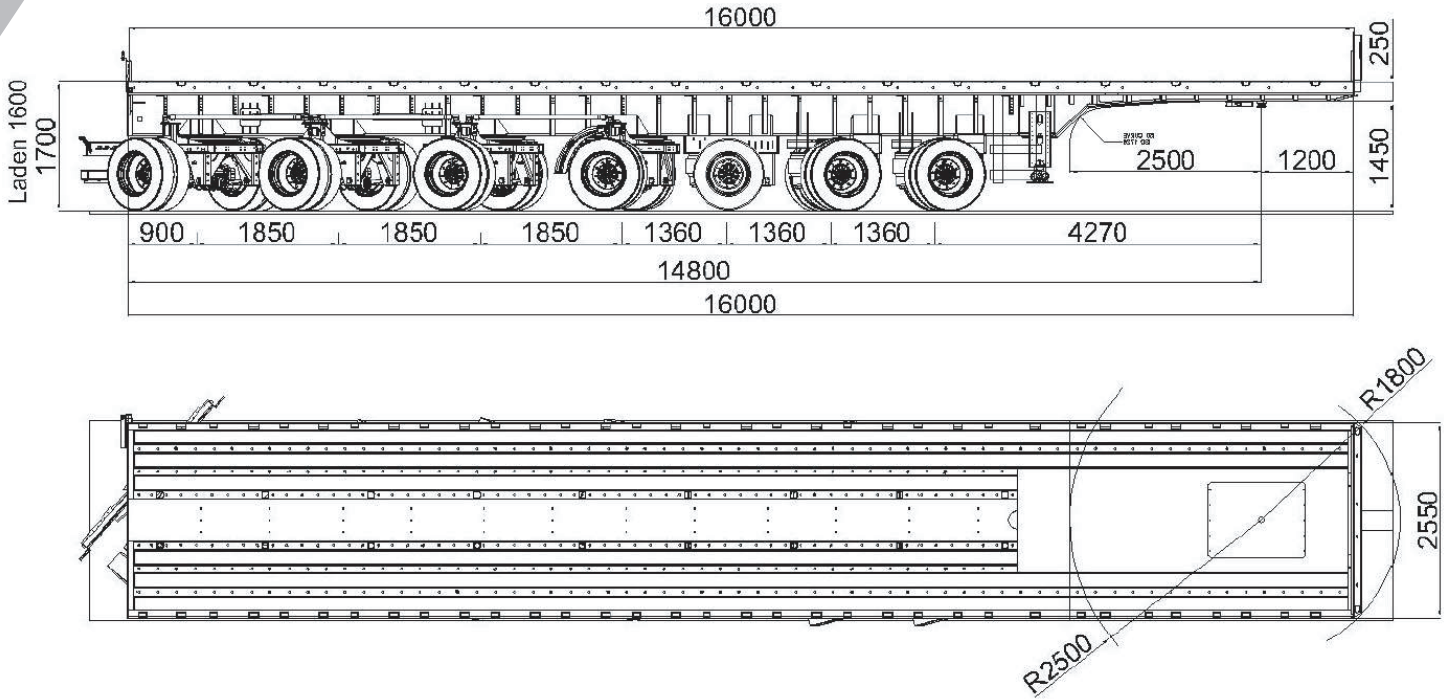

7 AXLES PLATFORM SEMI TRAILER

GENERAL CHARACTERISTICS

- Dead weight is 19,2 tons
- 16 meters long loading platform
- Multiple lashing rings RUD
- Pillar pockets and multiple lashing holes
- Galvanized pillars and their holder
- 275/70 R22,5 PIRELLI with TPMS
- Automatic lubrication system by GROENEVELD
- Access ladders to the loading platform

LIGHTING SYSTEM

- 24V according to European Norms, ASPÖCK ASS3 waterproof pins and plugs
- ASPÖCK fully LED lighting components, reflector kits, overload marker boards
- "CONVOI EXCEPTIONNEL" written reflective board

AXLES & SUSPENSION

- BPW axles with 12 tons of capacity
- Air suspension system
- 1st & 2nd axles are both liftable and self steering
- 3rd axle is fixed and rest of the axles are turn table type hydraulic steering
- Manual steering via wireless remote controller
- Automatic axle alignment via wireless remote controller
- All hydraulic steering systems and wireless remote controlling systems are supplied by TRIDEC

BRAKING SYSTEM

- Electro-pneumatic braking system according to European Norms
- WABCO 4S-3M EBS brake assembly
- Roll stability system

FINISHING

- Shot blasting with SA2 norms
- Full body metallization with 15 years anti-rust warranty
- Two layers of primer and 2K acrylic painting
- All painting components are supplied by BASF

